

KABLE KONTROL® Black Zip Ties



- UL94V-2 Flame Rating
- Made With UV Stabilized Nylon 6-6 Material
- Standard, Heavy Duty, Or Extra Heavy Duty Break Strengths
- Operating Temperature Range -40° - 185° F
- High Resistance To Sun & Outdoor Exposure
- Self Locking Design
- Smooth Finish, Saves Hands From Abrasion
- Conforms to ASTM-D4066 PA181
- RoHS Compliant: RoHS Compliant 2011/65/EU

UV resistant black zip ties are the ideal option for outdoor applications where zip ties will be exposed to a higher than normal amount of ultra-violet rays from the sun. These black nylon cable ties are specifically manufactured to be used for continuous or extended exposure to the outdoors, weather, and UV light especially. Black Tie wraps can also be used in indoor applications.

MEETS QUALITY STANDARDS



MATERIAL


Nylon 6/6- UV Stabilized

MILITARY, FEDERAL, AND ASTM SPECIFICATIONS

ASTM-D4066 PA181



PART NUMBER	Length	Pack Quantity	Tensile Strength	Strap Width	Max Bundle Diameter
CT242	4" Long	100	18 lbs	2.5 mm	1"
CT208	4" Long	1000	18 lbs	2.5 mm	1"
CT-506-M	5.5" Long	1000	18 lbs	2.5 mm	1.12"
CT259	8" Long	1000	18 lbs	2.5 mm	2.16"
CT243	8" Long	1000	40 lbs	3.5 mm	2.16"
CT266	8" Long	100	50 lbs	4.8 mm	2.16"
CT212	8" Long	500	50 lbs	4.8 mm	2.16"
CT209	8" Long	1000	50 lbs	4.8 mm	2.16"
CT278	8" Long	100	120 lbs	7.6 mm	2.16"
CT102	9" Long	100	250 lbs	12.7 mm	2.3"
CT267	11" Long	100	50 lbs	4.8 mm	3.18"
CT219	11" Long	500	50 lbs	4.8 mm	3.18"
CT221	11" Long	1000	50 lbs	4.8 mm	3.18"
CT277	11" Long	100	120 lbs	7.6 mm	3.18"
CT268	14" Long	100	50 lbs	4.8 mm	4.01"
CT255	14" Long	500	50 lbs	4.8 mm	4.01"
CT257	14" Long	1000	50 lbs	4.8 mm	4.01"
CT274	14" Long	100	120 lbs	7.6 mm	4.01"
CT15BK	15" Long	100	250 lbs	12.7 mm	4.125"
CT7109	18" Long	100	120 lbs	7.6 mm	4.7"
CT19BK	19" Long	100	250 lbs	12.7 mm	5"
CT104	22" Long	100	250 lbs	12.7 mm	6"
CT-24-BK-100PK	24" Long	100	175 lbs	9 mm	6.64"
CT276	28" Long	100	175 lbs	9 mm	8.66"
CT275	32" Long	50	175 lbs	9 mm	9.68"
CT299	36" Long	100	50 lbs	4.8 mm	10.5"
CT297HV-50	36" Long	50	175 lbs	9 mm	10.5"
CT297HV-100	36" Long	100	175 lbs	9 mm	10.5"
CT40BK-50	40" Long	50	250 lbs	12.7 mm	11.7"
CT293	48" Long	50	175 lbs	9 mm	14.96"
CT298B	60" Long	50	175 lbs	9 mm	20"

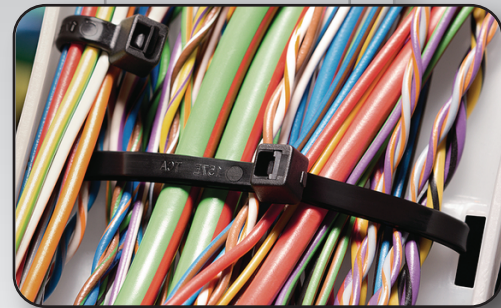

KABLE KONTROL®