







AlturnaMat® is a mat boasting an aggressive diamond plate tread design and a high load capacity ideal for use over soft or sensitive ground conditions in the construction, civil engineering, ground work, and events industries. These rugged mats are made of .5-in. thick polyethylene making them virtually indestructible. AlturnaMat® can withstand loads of up to 120 tons*, and its flexible construction means that these mats will follow the contours of the ground to deliver a highly-effective access solution over undulating or sloping ground conditions.

Weighing just 86 lbs at its maximum size, and just 21 lbs at its smallest, AlturnaMat® can be easily deployed and maneuvered without any special equipment with the added optional convenience of strategically positioned hand holes. AlturnaMat® can be connected together using our Turn-A-Link connectors to create a secure trackway or workpad.

- 100% recycled high-density polyethylene (HDPE)
- Diamond cleat tread surface provides impressive grip
- Optional hand holes for easy maneuverability
- Supports loads of up to 120 tons*
- Available in black or clear


- Two connector options
- · Connection points at each corner of the mat
- Man-deployable
- Low-profile VersaMat® or smooth surface also available
- Contours to different ground conditions due to its flexible construction

^{*} Load bearing capacity is subject to ground conditions. Sizing is subject to a manufacturing variance of +/- 5%.

AlturnaMat® is a ground protection solution with diamond cleat tread and a load capacity of up to 120 tons*. Lightweight, flexible, and durable, the AlturnaMat® is available in a range of sizes and is ideal for use in construction, civil engineering, ground works, and event industries.

Material: 100% recycled high-density polyethylene (HDPE)

- Range of sizes available
- Maximum weight 86 lbs
- Load bearing capacity 120 tons*
- Diamond cleat surface tread
- Optional hand holes for easy maneuverability
- Available in black or clear
- Limited lifetime warranty

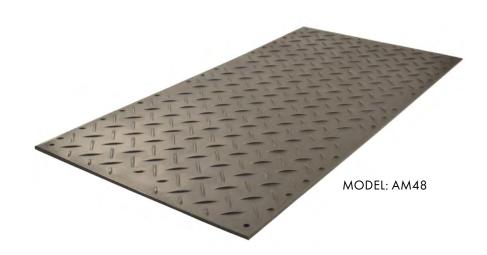

Slack

WARNING: This product can expose you to chemicals including Lead, Chromium, Nickel Compounds, and Sulfur Dioxide, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

lear

WARNING: This product can expose you to chemicals including Lead, Carbon Black, Chromium, Nickel Compounds, and Sulfur Dioxide, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

* Load bearing capacity is subject to ground conditions. Sizing is subject to a manufacturing variance of +/- 5%.

APPLICATIONS

- Civil Engineering
- Construction
- Military Sit
- Landscapin
- Infrastructure and Utilities
- Transmission
- Oil and Ga

ACCESSORIES AND SPECIFICATIONS

ROUND TURN-A-LINKS MODEL: RTL-D-G




These round connectors can connect two or four AlturnaMats® to create a temporary work site or walk way.

FLAT TURN-A-LINKS MODEL: FTL-D-G



These flat connectors can connect two or four AlturnaMats® to create a temporary work site or walk way.

Model	Length	Width	Depth	Weight
AM24	24 in. (60.9 cm)	48 in. (121.9 cm)	0.5 in. (1.27 cm)	21.5 lbs.
AM26	24 in. (60.9 cm)	72 in. (182.8 cm)	0.5 in. (1.27 cm)	32.4 lbs.
AM28	24 in. (60.9 cm)	96 in. (243.8 cm)	0.5 in. (1.27 cm)	43 lbs.
AM36	36 in. (91.4 cm)	72 in. (182.8 cm)	0.5 in. (1.27 cm)	51 lbs.
AM38	36 in. (91.4 cm)	96 in. (243.8 cm)	0.5 in. (1.27 cm)	64 lbs.
AM48	48 in. (91.4 cm)	96 in. (243.8 cm)	0.5 in. (1.27 cm)	86 lbs.
RTL-D-G	-	-	-	-

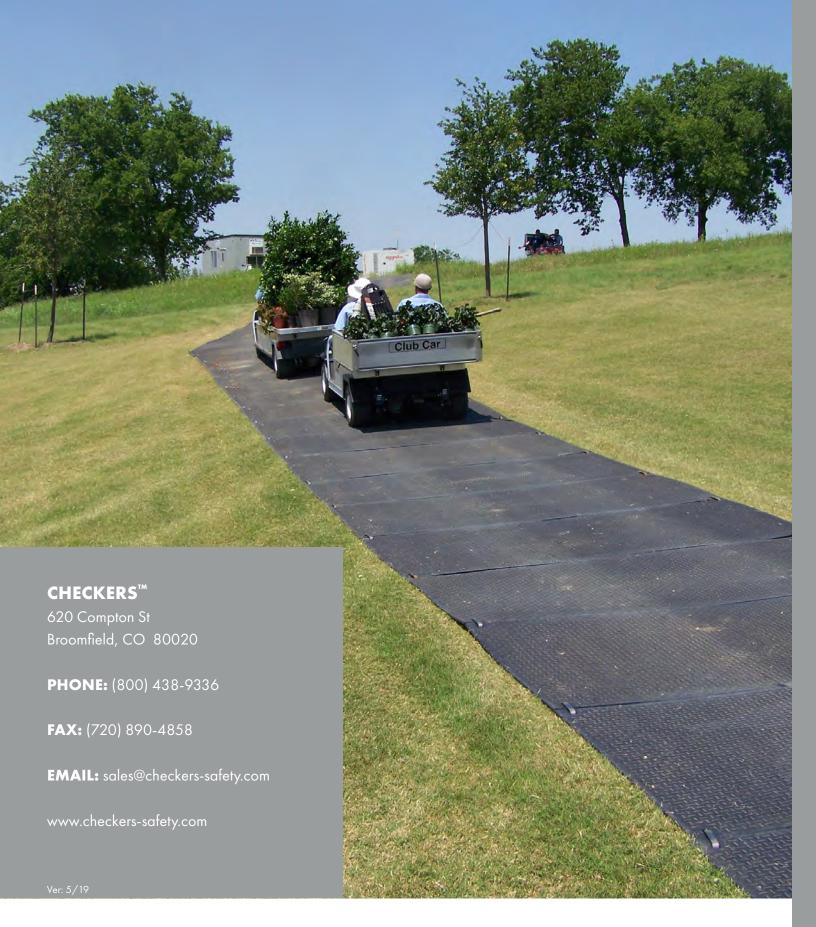

A PRODUCT OF:



Justrite Safety Group is the leading source of safety equipment for flammables and hazardous materials storage and handling, asset protection, environmental protection spill containment, absorbents, specialized chemical storage, cable management, safety showers, eye/face washes, matting, and vehicle safety equipment. Learn more at Justrite.com, Checkers-safety.com, and Notrax.com.